


USB3-AM-AF

USB 3.0 Copper A-male to A-female

SPECIFICATION :

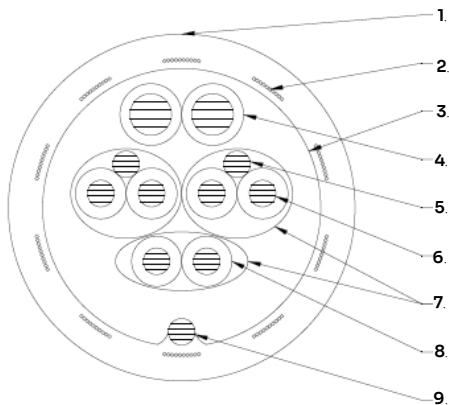


1. OUTER JACKET: BLACK PVC OD \varnothing 6.2 \pm 0.15MM
2. BRAIDING: 96/0.12AM
3. SHIELDING: 17*0.025MMAL
4. FOAMED PE WIRE: 14/0. TC PE \varnothing 1.3
5. DRAIN WIRE: 7/0.12TC
6. SIGNAL WIRE: 1/0.41BC FPE \varnothing 1.18
7. SHIELDING: 8*0.025MMAL
8. SIGNAL WIRE: 1/0.41BC FPE \varnothing 1.8
9. DRAIN WIRE: 1/0.32BC



USB3-AM-AF

Item	Length
USB3-AM-AF-10	10m
USB3-AM-AF-15	15m

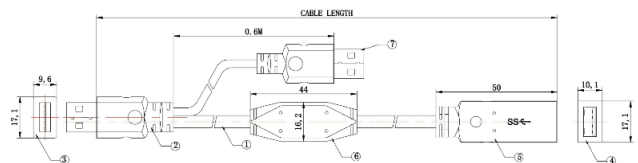

1. USB 3.0 CABLE
2. PLASTIC MOLDING
3. USB 3.0 CONNECTOR A- MALE
4. USB 3.0 CONNECTOR A- FEMALE
5. BUILD-IN AMPLIFIER
6. BUILD-IN AMPLIFIER (7.5M-10M*1, 12.5M-15M*2)
7. USB POWER SUPPLY CABLE



Cable

USB 3.0 Copper A-male to A-female