


USB3-AM-AF-O

USB 3.0 Optic A-male to A-female

SPECIFICATION :

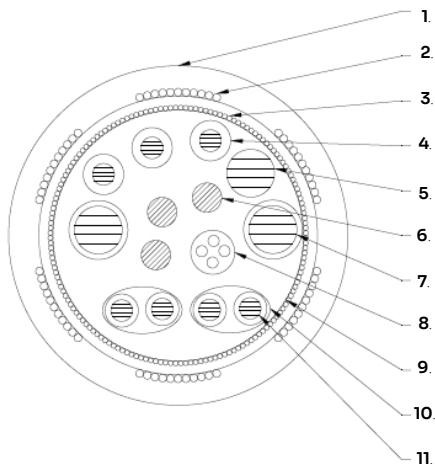


1. OUTER JACKET: BLACK TPE OD \varnothing 5.0 \pm 0.15MM
2. KEVLAR FIBER 1000D*6
3. BRAIDING: 128/0.10TC
4. SIGNAL WIRE: 1/0.32Cu*3C PE \varnothing 0.7
5. DRAIN WIRE: 43/0.12TC
6. KEVLAR FIBER 1000D*3
7. POWER WIRE: 43/0.12TC*2C FEP \varnothing 1.3
8. OPTICAL FIBER
9. SHIELDING: 17*0.025MMAL
10. SHIELDING: 8*0.025MMAL
11. FOAMED PE WIRE: 1/0.32Cu*2P FPE \varnothing 1.0



USB3-AM-AF-O

Item	Length
USB3-AM-AF-O10	10m
USB3-AM-AF-O20	20m
USB3-AM-AF-O50	50m

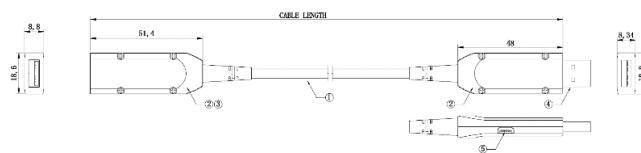

1. OPTIC USB 3.0 CABLE
2. METAL HOUSING
3. USB-A CONNECTOR FEMALE
4. USB-A CONNECTOR MALE
5. MICRO USB FOR POWER



Cable

USB 3.0 Optic A-male to A-female