


USB3-AM-BM-20

USB 3.0 Copper A-male to B-male 20 m

SPECIFICATION :

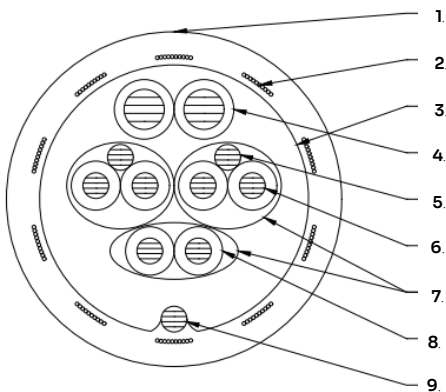


1. OUTER JACKET: BLACK PVC ODØ6.2±0.15MM
2. BRAIDING: 96/0.12AM
3. SHIELDING: 17*0.025MMAL
4. FOAMED PE WIRE: 14/0. TC PEØ1.3
5. DRAIN WIRE: 7/0.12TC
6. SIGNAL WIRE: 1/0.41BC FPEØ1.18
7. SHIELDING: 8*0.025MMAL
8. SIGNAL WIRE: 1/0.41BC FPEØ1.8
9. DRAIN WIRE: 1/0.32BC



USB3-AM-BM-20

Item	Length
USB3-AM-BM-20	20m

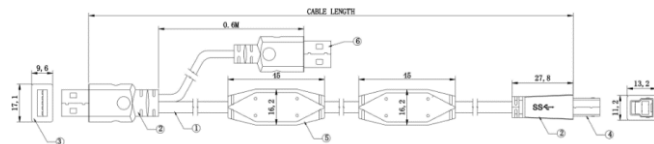

1. USB 3.0 CABLE
2. PLASTIC MOLDING
3. USB 3.1 CONNECTOR C-MALE
4. USB 3.0 CONNECTOR B- MALE
5. BUILD-IN AMPLIFIER



Cable

USB 3.0 Copper A-male to B-male 20 m